




CLASSIC / NUEVO

Print Media For Textured Surfaces Outdoors

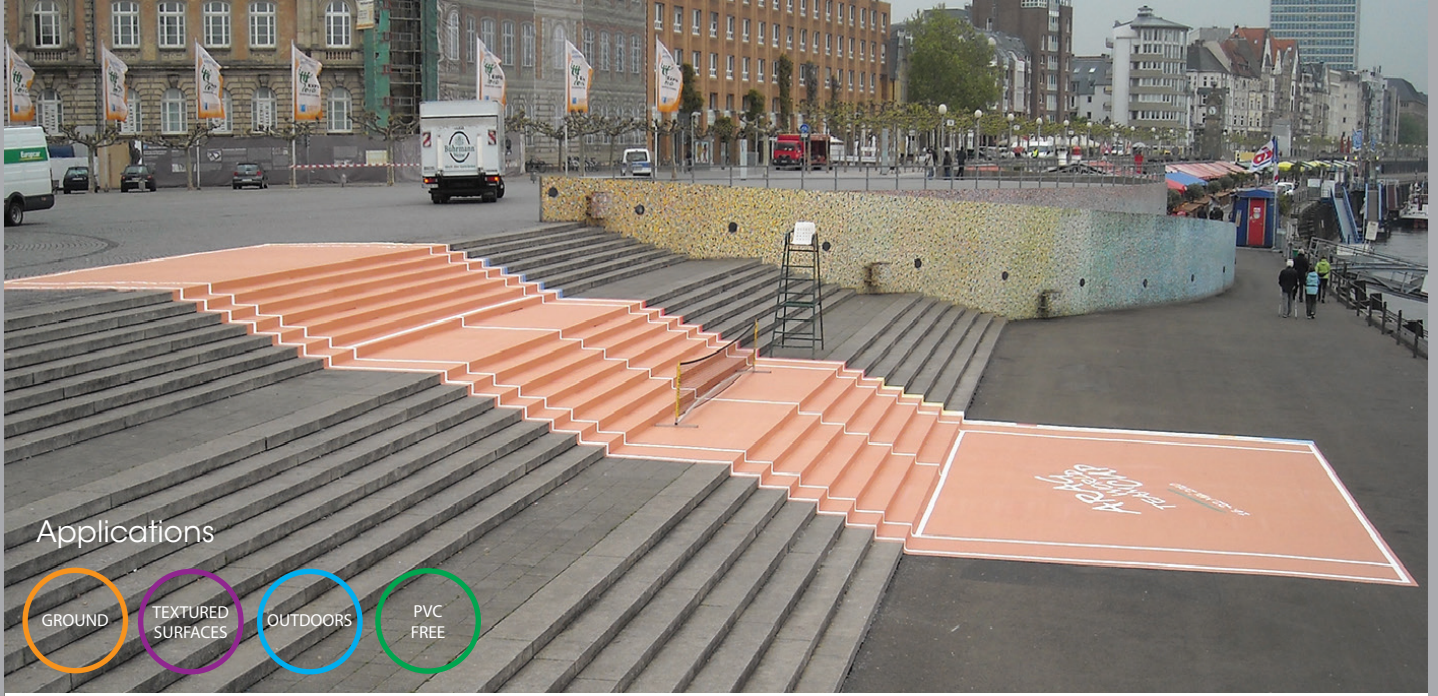

Applications



Description

Asphalt Art Classic is a highly conformable foil based print media suitable for textured surfaces outdoors. Performance and reliability make Asphalt Art the worlds most trusted outdoor media. Comes with an R13 CSIRO non-slip certification.

Features & Benefits

- Suitable for textured surfaces outdoors
- Highly conformable provides a "painted on" effect
- Up to 6 month durability in regular conditions
- R13 CSIRO non-slip certification
- No overlamine required
- 100% recyclable

Surfaces

- > Asphalt
- > Concrete
- > Pavers

Slip Resistance

R13 CSIRO Non-slip Certification
Australian / New Zealand standards AS 4586:2013

Test First

Every surface is different and changes with time so we recommend trailing first with a small piece in a inconspicuous location. Trial over a minimum 4 week period to determine suitability for intended surface

Applications

- Sporting events, public events & promotions
- Footpath advertising & guerrilla marketing
- Wayfinding
- Social distancing

Durability

Asphalt Art durability depends on many factors including the surface it is applied to and the frequency of abrasive forces. Please see guide below;

- > Low Traffic - 6 months+
- > High Traffic - 3 months

Technical Information

Composition: Textured polyurethane top coat on aluminium foil base
Size Width: 1220m
Length: 30.48m
Print Method: UV roll to roll only
PVC Free & Recyclable

Warranty

Since there is no control under which conditions the product has been applied or has been used, all product warranty automatically end as soon as the product has been applied to any surface



SMOOTH

Print Media For Textured Walls Indoors / Outdoors



Applications



Description

Asphalt Art Smooth is a highly conformable foil based print media suitable for textured walls indoors & outdoors. Produces a stunning "painted on" effect on textured and uneven wall surfaces.

Features & Benefits

- Suitable for textured & uneven wall surfaces
- For use indoors & outdoors
- Highly conformable foil provides a "painted on" effect
- Installs easily without heat
- No overlamine required

Surfaces

- > Brick
- > Concrete
- > Render

Test First

Every surface is different and changes with time so we recommend trailing first with a small piece in a inconspicuous location. Trial over a minimum 4 week period to determine suitability for intended surface

Applications

- Retail, cafe & bar wall decoration
- Corporate & building signage
- Galleries, museums & universities

Technical Information & Durability

Composition: Smooth polyurethane top coat on aluminium foil base
 Size Width: 1220m
 Length: 30.48m
 Print Method: UV, Solvent & Latex
 Durability: 24 months
 PVC Free & Recyclable

Warranty

Since there is no control under which conditions the product has been applied or has been used, all product warranty automatically end as soon as the product has been applied to any surface



CLASSIC / NUEVO

Print Media For Textured Surfaces Outdoors



Infrastructure Technology

Materials Science & Engineering, Graham Road (PO Box 56), Highett, Victoria, Australia 3190
Telephone: 61 3 9252 6000 Facsimile: 61 3 9252 6244 Email: tiles@csiro.au Web: http://www.cmse.csiro.au

Registered Testing Authority - CSIRO

6 February 2013

Our Ref. EN13 / 2114 03/0212

TEST REPORT No. 6259s

Requested by: Asphalt Art Australia
PO Box 230
St Kilda
VIC 3182

on (date): 9 May 2012

Manufacturer: Asphalt Art

Product Desc.: Asphalt Art, Foil based print media with textured polyurethane top coating

Sampling details:

Where: Delivered

Date: 23 January 2013

By whom: Courier

How (methods): N/A

The results reported relate only to the sample(s) tested and the information received. No responsibility is taken for the accuracy of the sampling unless it is done under our own supervision. CSIRO cannot accept responsibility for deviations in the manufactured quality and performance of the product. While CSIRO takes care in preparing the reports it provides to clients, it does not warrant that the information in this particular report will be free of errors or omissions or that it will be suitable for the client's purposes. CSIRO will not be responsible for the results of any actions taken by the client or any other person on the basis of the information contained in the report or any opinions expressed in it. The reproduction of this test report is only authorised in the form of a complete photographic facsimile. Our written approval is necessary for any partial reproduction.

This test report consists of 4 pages

SUMMARY OF SLIP RESISTANCE TESTS PERFORMED:

		Result	Class
AS/NZS 4586:2004	Slip resistance classification of new pedestrian surface materials Appendix A: WET Pendulum (Four S slider):		
	Mean BPN:	55	V [LOW*]
AS/NZS 4586:2004	Slip resistance classification of new pedestrian surface materials, Appendix D: OIL-WET Ramp		
	Mean overall acceptance angle:	35.0°	R 13 [LOW*]

* = CSIRO classification

In order to interpret the classifications, please refer to Standards Australia Handbook 197, An Introductory Guide to the Slip Resistance of Pedestrian Surface Materials, which recommends minimum classifications for a wide variety of locations.

It is important to realise that test results obtained on unused factory-fresh samples may not be directly applicable in service, where proprietary surface coatings, contamination, wear and subsequent cleaning all influence the behaviour of the pedestrian surface.